



## QuickConnect Rudder System #7209


### 1. Install Rudder onto Transom Bracket

Place Rudder Bracket onto Motor Bracket with 5.5" hex bolt and nylon thumb screw.



### 2. Attach Ball Joint to Swing Arm

Push sleeve back on ball joint connector, then insert steering cable and release sleeve.

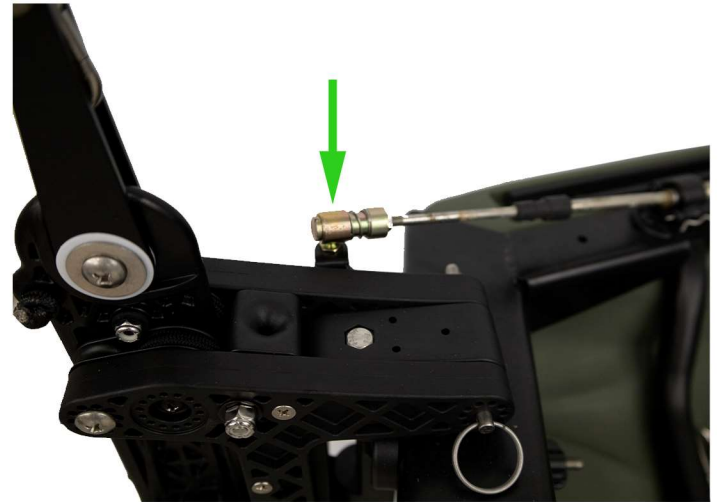

### 3. Connect Retract Cord to Rudder Carabiner



### 4. Adjust Rudder Blade Depth (as necessary)

Adjust rudder blade depth by moving rudder stop from top position to a lower position.

