



Flint Layout Duck Blind Instructions

1. Parts List

- 1 – Layout Blind
- 2 – Door Panels
- 2 – Deck Rings


- 2 – Self Tapping Screws
- 2 – Washers

2. Install Layout Blind

- a. Install provided deck rings using self-tapping screws and washers as is shown in the picture below.



- b. Install blind over bow and stern of the Flint.
- c. Connect hooks at the ends of the battens to the Deck Rings on the Flint inside gunwale. There are a total of 4 hooks.

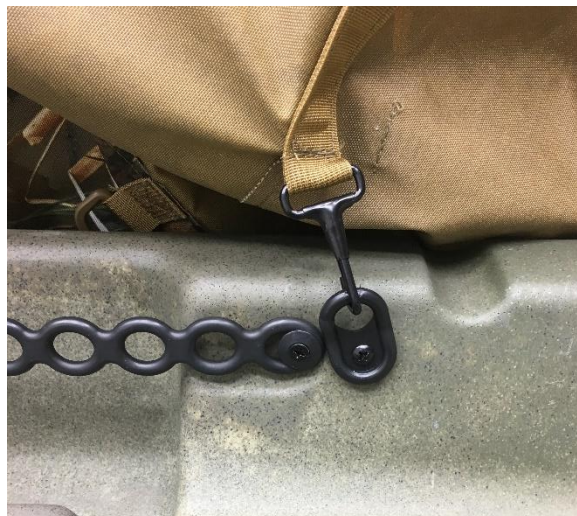

- d. Secure blind on Flint by cinching bungee cords on the stern end.
- 3. Install Door Panels**
- a. Connect Door panels via buckles.
 - b. Tapered end goes to towards the stern of the Flint.
 - c. Tighten as desired via strap on stern end buckle.



4. Ready to Use!

